




Neo-Sunny

Petrol Pumps & Dispensers



TATSUNO
FILLS UP YOUR *Happiness*

Dimensions

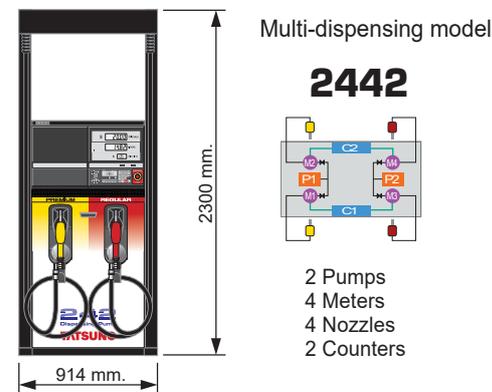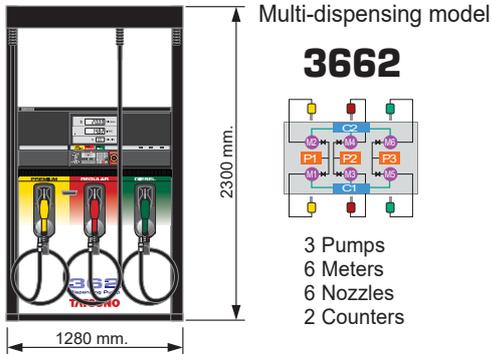

Specifications (Standard Models)

| | | |
|---------------------------|---|--|
| Model Name & type | GDA/GDB suction series | Narrow GDA/GSA models : Lane Oriented (Nozzle front model) or Island Oriented (Nozzle side model), Narrow body with or without top case (canopy) |
| | GSA/GSB remote series | Wide GDB/GSB models : Lane Oriented (Nozzle front model), Wide body with top case (canopy) |
| Delivery Speed | Suction models : Standard speed (Gasoline/Diesel) : 40 liter/min. High speed (Diesel) : 70 liter/min. *Note : Simultaneous fueling 30 or 35 L/min. at standard speed & Reduction by half at high speed for Front 122, 242, 244, 362, 482 models) Remote models : Depend on the on-site submersible pump capacity | |
| Measuring Accuracy | ±0.25 % | |
| Flow Meter | 4-piston positive displacement flow meter and electric calibration system | |
| Suction pumping Unit | Internal silent gear pump with air separator, by-pass valve, and suction strainer and check valve | |
| Motor | 1-Phase Induction motor, Explosion-proof, 220 VAC ±0.10%, 50/60 Hz, 3/4 HP. | |
| Counter | 1) Type : LCD (Liquid Crystal Display) 2) Character color : Black characters on a white field with bright LED back light 3) Display : Amount - 6 digits H : 35mm, Volume - 6 digits H : 35mm, Unit price - 4 digits H : 22mm 4) Unit price setting : By remote control 5) Electronic totalizer : 10 digits 6) Other functions : Self-diagnosis function, Battery back-up, Over voltage protector | |
| Preset | Presetable for amount and volume with ten(10) keypad + 5-rank one-touch key buttons | |
| Totalizer | Electro-magnetic type : 7 digits (Volume for each hose) combined with Standard or Optional flow meter. | |
| Reset Device | Automatic rest in nozzle holster | |
| Nozzle | Tatsuno nozzle with color scarf guard Spout size : 13/16" or 15/16" | |
| Swivel | Single type | |
| Hose | Black, 3/4" X 15 FT, Oil Resistant | |
| Safety Breakaway Coupling | Provided : Tatsuno(Non-reusable) | |
| Filter for remote models | Paper filter | |
| Painting | White | |
| Product sticker | Not provided | |
| POS Interface | POS interface (RS-485) | |
| Emergency Stop button | Provided | |

※ Note: The delivery speed of the pump may change due to the following conditions if it is used beyond Tatsuno's installation and operational instructions:
 1) Size and length of hose 2) Size and type of nozzle/swivel 3) Oil products, suction condition, and local piping conditions
 4) With/without preset (Specifications are subject to change with or without prior notice.)



Website: www.tatsuno.co.th
 Line: salesbu
 Facebook: Tatsuno Thailand Co., Ltd.
 Tel: +66 2 532-7101
 061-386-4488, 065-503-4777

TATSUNO (THAILAND) CO., LTD.
 1/8 Mu 3 Ladsawai Lamukka
 Pathumthani, Thailand 12150